

Natural Gas Generator set data sheet (01-01-2018)

Prime 150kWe, Natural Gas



Gas Generator Set Model:	TDA188G	Gas Engine Model:	Doosan GE012TI	Alternator Model:	Leroy Somer LSA 46.3 S3
---------------------------------	---------	--------------------------	----------------	--------------------------	-------------------------

50Hz 1500 r.p.m	3 Phase 4 Wires	Power Factor: Cos ϕ = 0.8	Emissions Standard	N/A
---------------------------	---------------------------	------------------------------------------	---------------------------	-----

RATINGS ²⁾	Prime Power (PRP)		Continuous Power (COP)		Rated Current	Thermal Output	Efficiency	
	kW	kVA	kW	kVA			Electrical	Thermal ³⁾
Voltage (V)	kW	kVA	kW	kVA	Amps	kW	η (%)	
380/220	150	187.5	N/A	N/A	284.9			
400/230	150	187.5	N/A	N/A	270.6			
415/240	150	187.5	N/A	N/A	260.9			
440/254	150	187.5	N/A	N/A	246.0			

Conditions and Defintions:

- 1) COP are applicable for supplying continuous electrical power for full load operations, there is no overload available.
- 2) Engine output data under ISO8528/1, ISO3046/1, BS5541/1, DIN6271 conditions.

Genset General Specifications

Gas Genset model	TDA188G	Electrical efficiency	N/A
Gas Engine model	GE012TI	Thermal efficiency	N/A
Electrical output (kW/kVA)	150/187.5	Total efficiency	N/A
Fuel	Natural gas	Speed regulating rate	0-5% Adjustable
Frequency (HZ)	50	Dimension (lengthxwidthxheight) (mm)	2900x1320x1750
Speed (rpm)	1500	Net Weight (kg)	2100

Engine Specifications

Manufacturer	Doosan
Model	GE012TI
Mechanical power	175 kWm
Speed	1500 rpm
Configuration / number of cylinders	In line / 6
Bore / Stroke	123/155 mm
Displacement	11.1 L
Compression ratio	10.5:1
Firing order	1-5-3-6-2-4
Direction of rotation	Counter clockwise from flywheel
Speed governor	Electronic
Ignition system	Altronic
Spark plug	NGK
Induction system	Turbo charge air cooled
Combustion type	Spark ignition
Cooling mode	Radiator

Exhaust system

Maximum permissible restriction	5.9 kPa
Exhaust gas flow	23 m ³ /min
Exhaust gas temperature	545°C

Intake system

Maximum permissible restriction	
- Initial	2.2kPa
- Final	6.2kPa

Fuel system

Maximum EPR rated pressure	6.9 kPa
Lower calorific value	37.25MJ/Nm ³
Gas consumption at 100% standby	47.8 Nm ³ /h
Gas consumption at 100% load	43.4 Nm ³ /h
Gas consumption at 75% load	34.3 Nm ³ /h
Gas consumption at 50% load	26.3 Nm ³ /h
Gas consumption at 25% load	16.8 Nm ³ /h

Cooling system

Total coolant capacity (engine only)	21 Litres
Standard thermostat range	71-85°C

Lubrication system

Engine oil capacity (min-max)	19-25 Litres
Oil consumption	≤0.5 g/kW.h
Oil grade	API CD or higher, SAE 15W-40

Electrical system

Charging generator	24V x 45A alternator
Starting motor	24V x 7kW
Battery voltage	24V
Ignition controller	12 or 24V DC

Thermal Data

Heat rejected to cooling water at rated Load	9.3 kW
Heat rejection per CAC	TBD

Alternator Specifications

50HZ/1500R.P.M

Manufacture / Brand	Leroy-Somer
Model	LSA46.3 S3
AVR model	R250
Coupling / Bearing	Direct /Single bearing
Phase	3 Phase
Power factor	Cos ϕ = 0.8
Winding pitch - code	2/3 - (wdg6)
Drip proof	IP 23
Excitation	Shunt

Prime output power	160kW/200kVA
Insulation class	H
Voltage regulation	± 0,5 %
Totale harmonic distortion THD _{no load}	<2.5% - on load <2.5%
Number of wires	12
Wave form : NEMA = TIF - (*)	< 50
Altitude	≤ 1000 m
Overspeed	2250 min ⁻¹
Air flow	0.48 m ³ /s

Control Panel



- Deep sea DSE7320 controller
 - Digital control panel
 - Volts, current, frequency, rpm (instruments)
 - Genset running hours
 - Battery voltage and charging
 - Over speed pre-alarm & shutdown
 - High water temp. pre-alarm & shutdown
 - Low oil pressure pre-alarm & shutdown
 - Low voltage pre-alarm & shutdown
 - Overcurrent pre-alarm & shutdown
-


Standard Features

- High efficient water cooled gas engine with radiator
- Brushless alternators (Class H, with AVR.)
- Heavy duty rubber anti-vibration mountings
- Starter batteries and connecting cables
- Separate engine-drive battery charging alternator
- Industrial silencer for open type generator sets
- Circuit breaker - 3 pole (MCCB)
- Maintenance free battery
- Low coolant level sensor
- Oil filter - Air filter
- Fully welded steel baseframe
- Ignition system
- Gas train: ball valve, gas filter, gas pressure regulator, pressure gauge, electromagnetic valve;
- Wiring with IEC standard
- Factory test certificate
- Operation & Maintenance manual & Diagrams
- Worldwide product / Technical support

Optional

- Automatic Transfer Switch (ATS)
- Canopy/Enclosure
- Water heater for severe cold weather
- Lub-oil heater for severe cold weather
- Silent containerised
- Residential silencer
- Panel for auto synchronization with Mains
- Extra air filters for time-maintenance
- Automatic oil supply system
- Extra oil filters for time-maintenance
- Parallel cabinet
- Full range of attachments and options available for alternator
- Flame arrestor in gas train
- Desulfurization system
- Gas pretreatment system
- Dehydration system
- Genset Commissioning / Testing on site

Combined Heat and Power Systems

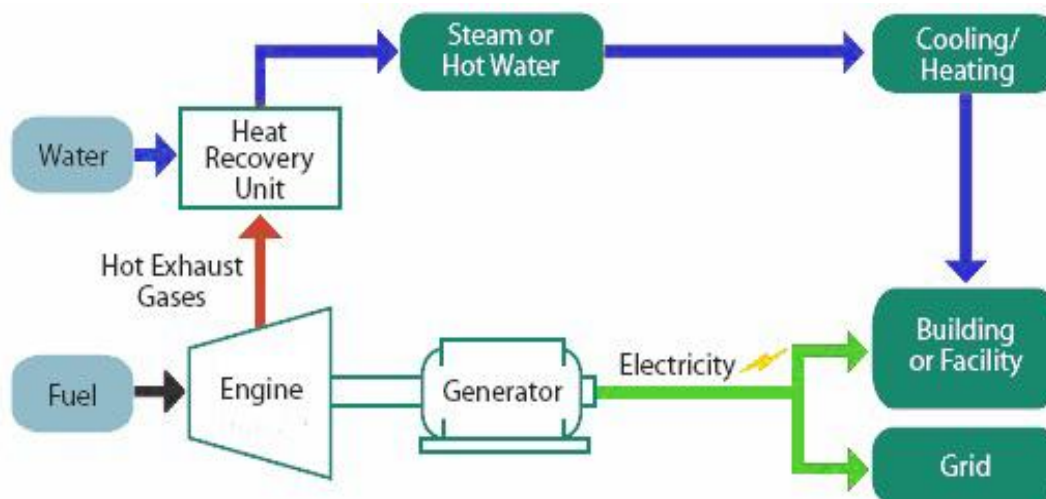

We offer Combined Cooling Heating and Power (CHP and CCHP) packages for our gas generator sets. It can recover 75%-90% combined electrical and thermal efficiency, resulting in major reductions in your overall energy costs. In the past years we have supplied CHP systems to Germany, Russia, Indonesia etc. We have the experience and capabilities to meet your total energy requirements.

Warranty

The goods of Tide Power Technology are under warranty against defects in materials and workmanship for period 1 year or 2000 hours operation time whichever come first from the date of delivery to the end user (except the damageable spare parts of genset caused by incorrect man-made operation), and that the aforementioned warranty for the same token is back up by the engine (8750 hours for continuous duty which should not exceed 75% of the prime power rating) & alternator manufactures and their global distributors.